



Art20C

Compact Brass Pressure Independent Control Valve





Technical data

Max pressure: 25 Bar
Working temp: -10°C to +120°C
Max Differential Pressure: 8 Bar (800kPa)

Features

- BSP Parallel (ISO 228/1)
- Easy flow selection via preset dial
- Automatic flow balancing with fluctuating pressures
- Flow modulation along whole control actuator stroke (ART C21V, C22V, C23E)
- Reduction of commissioning, improved energy saving
- Phased installation and system future proofing
- Union tail pieces BSPM 2 required per valve

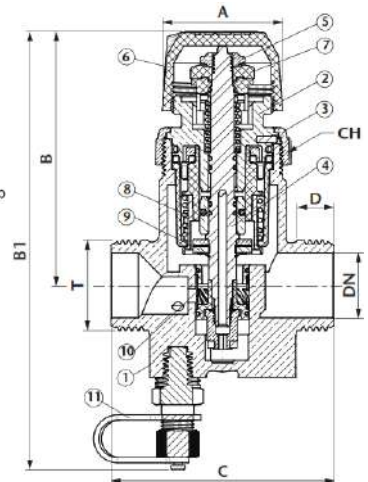

DN	10LF	10HF	15LF	15HF	20HF	25HF
A	35	35	35	35	35	35
B	75	75	75	75	85	83
B1	130	130	130	130	150	146
C	53	53	65	65	82	104
D	9	9	11	11	12	13
T	G.1/2"	G.1/2"	G.3/4"	G.3/4"	G.1"	G.1 1/4"
CH	39	39	39	39	39	39
Flow (l/s)	0.012-0.042	0.024-0.097	0.024-0.097	0.027-0.134	0.042-0.250	0.076-0.447
Min ΔP (kPa)	15-16	13-16.5	13-16.5	12.5-19.5	18-26	18-37
Kvs	0.11-0.37	0.24-0.86	0.24-0.86	0.27-1.09	0.35-1.77	0.64-2.65
Kgs	0.45	0.45	0.49	0.49	0.79	0.96

N.	Part Name	Materials
1	Body	DZR Brass CW602N-M
2	Bonnet	DZR Brass CW602N-M
3	Fixing Ring	DZR Brass CW602N-M
4	Stem	Stainless Steel
5	Locking Nut	Brass
6	Plastic Cap	Plastic
7	Dial	Plastic
8	DPC Controller	DZR Brass CW602N-M
9	Gasket	EPDM
10	Regulator	DZR Brass CW602N-M
11	Binder	DZR Brass CW602N-M

