



Art27

DZR Brass Fixed Orifice Plate



Features


- BSP Parallel (1/2") Taper (3/4" - 2") (ISO 7/1)
- Fixed orifice with $\pm 5\%$ flow measurement accuracy
- Can be close coupled to a double regulating valve
- Supplied with 2 fitted test points
- 1/2" available in Std, Med, Low, Ultra Low and Ultra Ultra Low flow versions



Technical data

Max pressure: 20 Bar

Working temp: -10°C to $+120^{\circ}\text{C}$

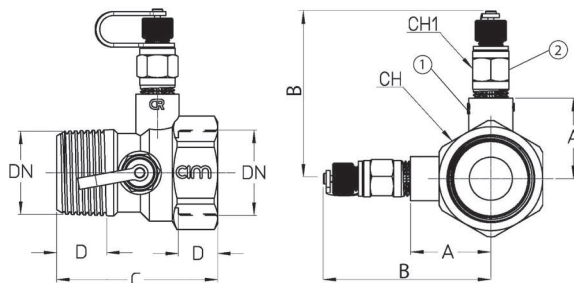

DN	1/2"UUL	1/2"UL	1/2"L	1/2"M	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
A	25	25	25	25	25	28	31	36	39	45
B	59	59	59	59	59	62	65	70	73	79
C	66.5	66.5	66.5	66.5	66.5	66.5	63.5	71	71	79.5
D	17	17	17	17	17	17	19	22	21	26
CH	28	28	28	28	28	34	40	51	56	71
CH1	14	14	14	14	14	14	14	14	14	14
Kvs	0.10	0.23	0.47	0.98	1.80	4.06	7.45	16.63	23.00	47.35
kgs	0.23	0.23	0.23	0.23	0.23	0.27	0.32	0.47	0.53	0.81

N.	Part Name	Materials
1	Body	DZR Brass
2	Binder Test Point	DZR Brass

