



Art901L

PN69 Stainless Steel 1 Piece Ball Valve




Technical data

Max pressure: $\frac{1}{4}$ " - $1\frac{1}{4}$ " 69 Bar
 $1\frac{1}{2}$ " - 2" 55 Bar

Working temp: -25°C to +200°C

Features

- BSP Taper (ISO 7/1)
- Reduced bore
- PN69 rated
- Locking device

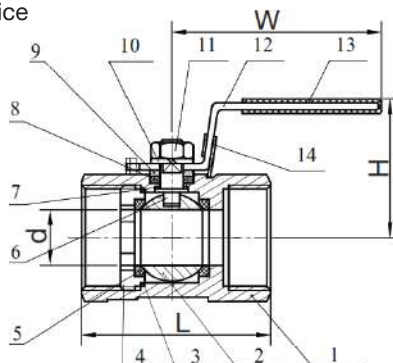

DN	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
d	5.0	7.0	9.0	12.5	15.0	20.0	25.0	32.0
L	40	45	60	60	71	78	82	100
H	33	36	37	42	52	56	65	70
W	67	67	93	93	103	103	125	125
Torque	2	2	3	3	4	5	7	9
Kv	3.6	9.4	23.0	28.5	43.8	63.0	102.0	165.0
Kgs	0.09	0.12	0.19	0.28	0.39	0.58	0.85	1.35

N. Part Name Materials

1	Body	CF8M
2	Ball	Stainless Steel 316
3	Body Gasket	PTFE
4	Cap	CF8M
5	Ball Seat	R-PTFE (15%)
6	Stem	Stainless Steel 316
7	Thrust Washer	PTFE
8	Stem Packing	PTFE
9	Washer	Stainless Steel 304
10	Spring Washer	Stainless Steel 304
11	Nut	Stainless Steel 304
12	Handle	Stainless Steel 304
13	Handle Cover	Plastic
14	Lock Device	Stainless Steel 304

