


Art2250 Stainless Steel Sight Glass (PN16 Flanged)

Features

1. Sight Glass.
2. Flanges ends according to DIN 2501 PN 16.
3. Face to Face according to DIN 3202 F1.
4. Made of Stainless Steel 1.4408 (CF8M).
5. Max. Working pressure 16 bar.
6. Tempered Soda-Lime glass (DIN 8902).
7. Normal Working temperature: 130 °C.
Maximum Temperature (short-term): 160°C.
Thermal Shock (DIN 52323): 120°C.

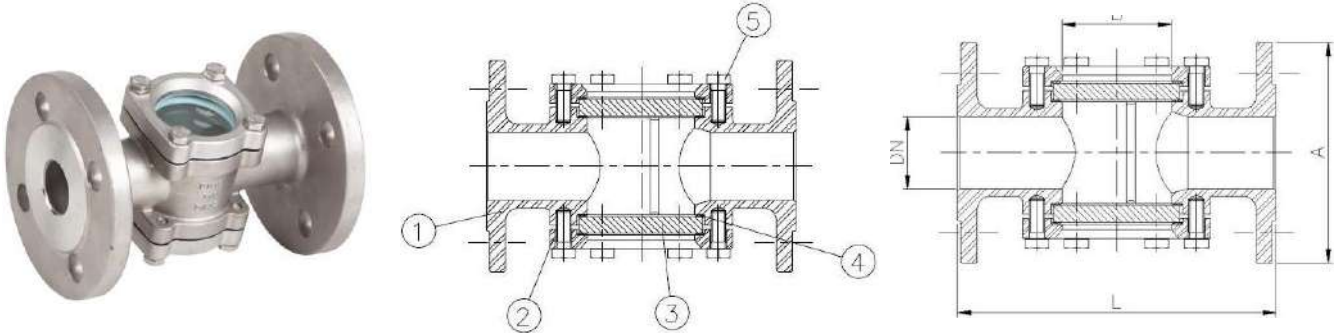

Nº	Name	Material	Surface Treatment	Ref
1	Body	Stainless Steel 1.4408	Shot Blasting	
2	Cover	Stainless Steel 1.4408	Shot Blasting	
3*	Glass	Tempered Soda-Lime Glass		C2250
4*	Gasket	PTFE		J2250
5	Bolt	Stainless Steel 304		

*Spare parts available.

General Dimensions

Ref	Size	PN	Dimensions (mm)			Glass	Weight (Kg)	
			DN	L	A			B
2250 04	1/2"	16	15	130	95	40	Ø 50 x 8	2.250
2250 05	3/4"	16	20	150	105	40	Ø 50 x 8	2.800
2250 06	1"	16	25	160	115	50	Ø 63 x 10	3.650
2250 07	1 1/4"	16	32	180	140	50	Ø 63 x 10	5.750
2250 08	1 1/2"	16	40	200	150	65	Ø 80 x 12	8.300
2250 09	2"	16	50	230	165	65	Ø 80 x 12	9.800
2250 10	2 1/2"	16	65	290	185	100	Ø 115 x 15	13.700
2250 11	3"	16	80	310	200	100	Ø 115 x 15	16.650
2250 12	4"	16	100	350	220	125	Ø 145 x 15	23.800

Pressure/Temperature Rating

