
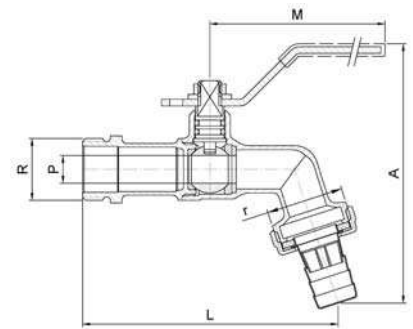


Art3059

Full Bore Brass Bibcock Ball Valve

Features

1. Bibcock ball valve to hose connection.
2. Full bore.
3. Brass construction acc/ UNE-EN 12165 chrome plated.
4. Gas (BSP) threaded male inlet acc/ ISO 228/1.
5. Fitting two-piece with diffuser for connect hose.
6. Working by means of steel lever handle.
7. Non ejectable stem.
8. PTFE Seats.
9. Working temperature from -20°C to 100°C.
10. Maximum working pressure 16 bar (PN 16).
11. Lockable in open and close position.

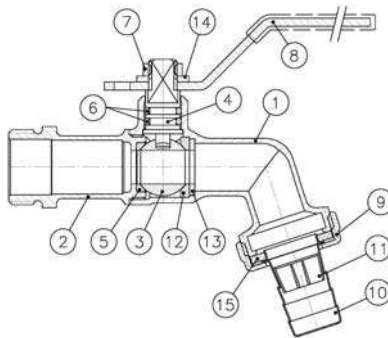

Nº	Name	Material	Surface Treatment
1	Cuerpo / Body	Latón / Brass (CW617N)	Granallado+Cromado / Peened+Chromed
2	Tapa / Cap	Latón / Brass (CW617N)	Granallado+Cromado / Peened+Chromed
3	Esfera / Ball	Latón / Brass (CW617N)	Cromado / Chrome plated
4	Eje / Stem	Latón / Brass (CW617N)	Cromado / Chrome plated
5	Asiento / Ball seat	PTFE	-
6	Junta tórica / O-ring	NBR	-
7	Tuerca / Nut	Acero Inox. / S.Steel AISI 304	-
8	Maneta / Handle	Acero / Steel	Dacromet / Dacromet
9	Tuerca / Nut	Latón / Brass (CW617N)	Granallado+Cromado / Peened+Chromed
10	Conexión / Hose Connection	*Latón - Ac. Inox. / Brass - SS	Cromado / Chrome plated
11	Difusor / Diffuser	Nylon	-
12	Asiento / Ball seat	PTFE	-
13	Anillo asiento / Seat ring	Latón / Brass (CW617N)	-
14	Arandela / Grower Washer	Acero Inox. / S.Steel AISI 304	-
15	Junta / Joint	NBR	-

*Hose connection in SS AISI 201 for 3059 04 & 3059 05, Brass CW617N for 3059 06.

Ref	Size (R x r)	Dimensions (mm)			Weight (Kg)
		P	A	L	
3059 04	1/2" x 3/4"	10	88	85	0,147
3059 05	3/4" x 1"	12	95	95	0,204
3059 06	1" x 1"	15	112	119	0,308