
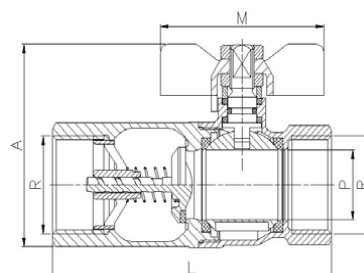


Art3123 Brass Ball & Check Valve (PN25)

Features

1. Brass ball valve, full bore.
2. Brass construction according to UNE-EN 12165 chrome plated.
3. Thread ends gas (BSP) female according to ISO 228/1.
4. Ball working by means butterfly aluminium handle.
5. Vulcanized NBR check valve sealing.
6. Stainless steel spring AISI 304.
7. Minimum opening pressure 0,03 Bar.
8. Maximum working pressure 25 bar (PN 25).
9. Working temperature from -20°C to 90°C.
10. PTFE Seats.



Nº	Name	Material	Surface Treatment
1	Cuerpo / Body	Latón / Brass (CW617N)	Granallado + Cromado / Peened + Chromed
2	Tapa Retención / Check Cap	Latón / Brass (CW617N)	Granallado + Cromado / Peened + Chromed
3	Esfera / Ball	Latón / Brass (CW617N)	Cromado / Chrome plated
4	Eje / Stem	Latón / Brass (CW617N)	Cromado / Chrome plated
5	Asientos / Ball seats	PTFE	-
6	Empaquetadura / Stem Packing	PTFE	-
7	Junta Tórica / O-Ring	NBR	-
8	Prensaestopas / Stem Ring	Latón / Brass (CW617N)	Cromado / Chrome plated
9	Tuerca / Nut	Latón / Brass (CW617N)	Cromado / Chrome plated
10	Palomilla / T-Handle	Aluminio / Aluminium	Painted / Pintado
11	Conjunto Eje / Stem Assembly	Latón+NBR / Brass+NBR	-
12	Muelle / Spring	Ac. Inox. / S.Steel (AISI 316)	-
13	Tope muelle / Stoper spring	Latón / Brass (CW617N)	Cromado / Chrome plated

Ref	Size (R)	P	Dimensions (mm)		M	Weight (Kg)
			L	A		
3123 04	1/2"	15	76	50	50	0,190
3123 05	3/4"	20	91	62	62	0,335
3123 06	1"	25	106	69	62	0,530



Pressure/Temperature Rating

