
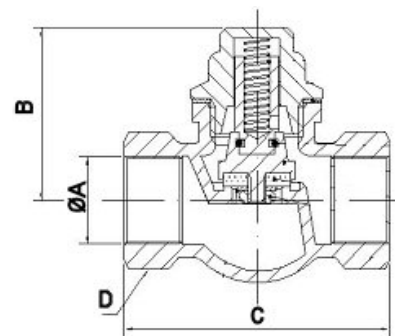


Art3187

Bronze Lift Check Valve (PTFE Seat)

Features

1. Maximum working pressure 16 bar (PN 16).
2. Bronze RG5 construction according EN 1982.
3. Sealing in PTFE (Teflon).
4. Spring in Stainless steel AISI 316.
5. F-F (BSP) gas threaded ends acc/ ISO 228/1.
6. Working temperature -10°C to 180°C.
7. Assembly in any position.

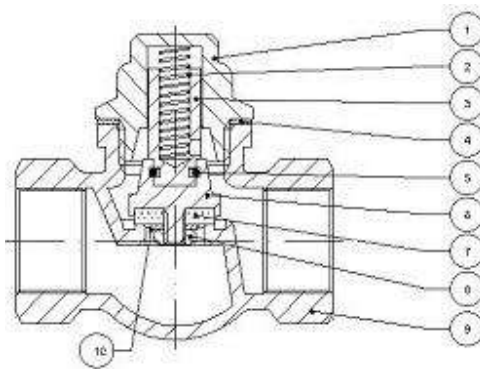

Nº	Name	Material	Surface Treatment
1	Tapa / Bonnet	Latón / Brass (CW614N)	Granallado / Peened
2	Muelle / Spring	Acero Inox. / S.Steel (AISI 316)	-
3	Eje / Stem	Latón / Brass (CW614N)	-
4	Junta / Joint	Fibra / Fiber (sil C-4400)	-
5	Anillo retención / Fixing ring	Acero Inox. / S.Steel	-
6	Obturador / Disc	Latón / Brass (CW614N)	-
7	Junta / Gasket	PTFE	-
8	Tuerca / Nut	Latón / Brass (CW614N)	-
9	Cuerpo / Body	Bronce / Bronze (CC491K)	-
10	Anillo / Ring	Latón / Brass (CW614N)	-

Ref	Size	Dimensions (mm)				Weight (Kg)
		ØA	B	C	D	
3187 03	3/8"	G 3/8"	38	45	CH22	0,145
3187 04	1/2"	G 1/2"	39	50	CH27	0,205
3187 05	3/4"	G 3/4"	48	61	CH32	0,340
3187 06	1"	G 1"	53	71	CH41	0,460
3187 07	1"-1/4	G 1"-1/4	56	85	CH50	0,770
3187 08	1"-1/2	G 1"-1/2	63	90	CH58	0,990
3187 09	2"	G 2"	72	110	CH70	1,640