


Art3228

Bronze PTFE Seat Globe Valve (PN16)

Features

- 1. Suitable for industrial and hydraulic installations.
- 2. Construction in bronze RG 5.
- 3. Gas (BSP) threaded female ends according to ISO 228/1.
- 4. Ideal for hot / cold water and different oils.
- 5. Working temperature from -10°C to 180°C.
- 6. Maximum working pressure 16 bar (PN 16).
- 7. PTFE sealing.

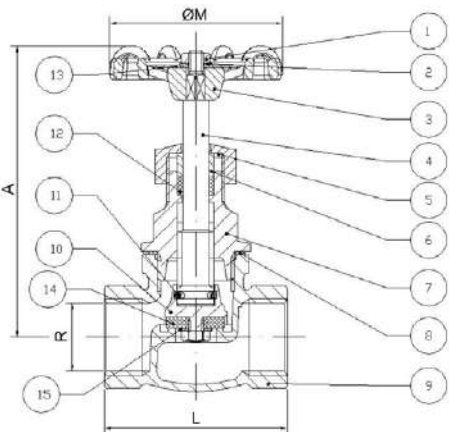

Nº	Name	Material
1	Tuerca / Nut	Latón / Brass (CW614N)
2	Arandela 1 / Washer 1	Acero galvanizado / Galvanized steel
3	Volante / Handwheel	Aluminio Pintado / Painted Aluminium
4	Eje / Stem	Latón / Brass (CW614N)
5	Anillo 1 / Ring 1	Latón / Brass (CW614N)
6	Prensaestopas / Packing nut	Latón / Brass (CW614N)
7	Tapa / Cap	Latón / Brass (CW614N)
8	Junta / Gasket	Fibra / Fiber SIL C4400
9	Cuerpo / Body	Bronce RG 5 (CC491K) / Bronze RG 5 (CC491K)
10	Obturador / Shutter	Latón / Brass (CW614N)
11	Anillo 2 / Ring 2	Acero galvanizado / Galvanized steel
12	Estopada / Packing	Grafito / Graphite
13	Placa / Plate	Aluminio / Aluminium
14	Cierre / Sealing	PTFE
15	Arandela 2 / Washer 2	Latón / Brass (CW614N)

Ref	Size R	Dimensions (mm)			Weight (Kg)
		A	L	M	
3228 03	3/8"	67	45	50	0,181
3228 04	1/2"	80	50	50	0,265
3228 05	3/4"	85	62	50	0,400
3228 06	1"	94	71	60	0,550
3228 07	1 1/4"	106	85	70	0,875
3228 08	1 1/2"	118	90	80	1,135
3228 09	2"	127	110	80	1,790