
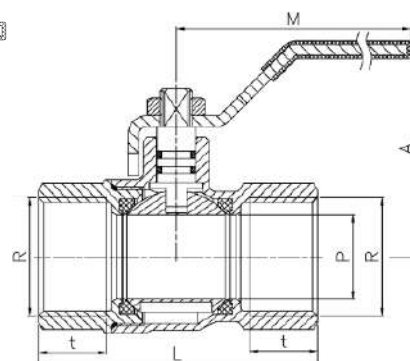


Art3500

Full Bore Brass Ball Valve For Gas (PN5)

Features

1. Brass according to UNE-EN 16164 - 12165.
2. Chrome-plated surface finishing
3. NBR joints according to EN 549
4. PTFE seats
5. Thread ends female acc/ to ISO 7/1 (EN 10226-1)
6. Guaranteed for the use of Natural Gas
7. Pressure class MOP 5 (0 to 5 bar)
8. Work temperature: from -20°C to 60°C
9. The valves can be blocked (at closed position) and sealed.
10. Stem with double NBR O-ring
11. Sealable lever handle made of steel with DACROMET® coating
12. Body and cap sealed by adhesive and O-ring
13. Requirements European Standard UNE-EN 331

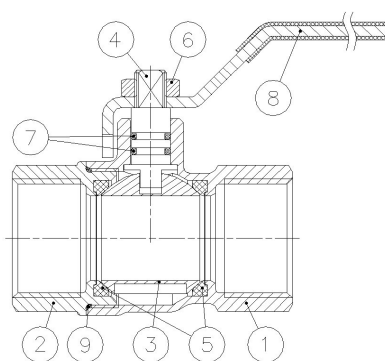

Nº	Name	Material	Surface Treatment
1	Cuerpo / Body	Latón / Brass (CW617N)	Granallado + Cromado / Peened + Chromed
2	Tapa / Cap	Latón / Brass (CW617N)	Granallado + Cromado / Peened + Chromed
3	Esfera / Ball	Latón / Brass (CW617N)	Cromado / Chrome-plated
4	Eje / Stem	Latón / Brass (CW614N)	Cromado / Chrome-plated
5	Asientos / Ball seats	PTFE	-
6	Tuerca / Nut	Latón / Brass (CW614N)	Cromado / Chrome-plated
7	Junta tórica / O-ring	NBR	-
8	Maneta / Handle	Acero / Steel	Dacromet® / Dacromet®
9	Junta tórica / O-ring	NBR	-

Ref	Size R	MOP	Dimensions (mm)						Weight (Kg)
			P (DN)	L	A	M	t	Minimum Thickness	
3500 04	1/2"	5	15	58	47	83	15,5	1,6	0,187
3500 05	3/4"	5	20	65	58	97	16,5	1,7	0,305
3500 06	1"	5	25	78	60,5	97	19,5	2	0,450
3500 07	1 1/4"	5	32	88	74	125	20	2	0,725