
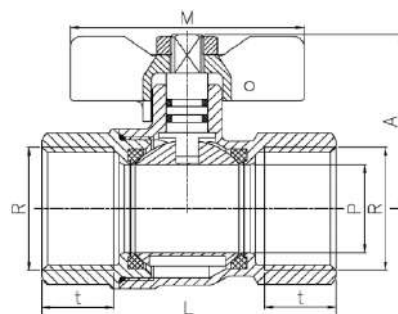


Art3505

Full Bore Brass Ball Valve For Gas (Butterfly Handle)

Features

1. Brass according to UNE-EN 12164 - 12165
2. Chrome-plated surface finishing
3. NBR joints according to EN 549
4. PTFE seats
5. Thread ends female-female according to ISO 7/1 (EN 10226-1)
6. Guaranteed for the use of Natural Gas
7. Pressure class MOP 5 (0 to 5 bar)
8. Work temperature: from -20°C to 60°C
9. The valves can be blocked (at closed position) and sealed
10. Stem with double NBR O-ring
11. Sealable aluminium butterfly handle
12. Body and cap sealed by adhesive and O-ring
13. Requirements European Standard UNE-EN 331



Nº	Name	Material	Surface Treatment
1	Cuerpo / Body	Latón / Brass (CW617N)	Granallado + Cromado / Peened + Chromed
2	Tapa / Cap	Latón / Brass (CW617N)	Granallado + Cromado / Peened + Chromed
3	Esfera / Ball	Latón / Brass (CW617N)	Cromado / Chrome-plated
4	Eje / Stem	Latón / Brass (CW614N)	Cromado / Chrome-plated
5	Asientos / Ball seats	PTFE	-
6	Tuerca / Nut	Latón / Brass (CW614N)	Cromado / Chrome-plated
7	Junta tórica / O-ring	NBR	-
8	Maneta / Handle	Aluminio / Aluminium	Pintado / Painted
9	Junta tórica / O-ring	NBR	-

Ref	Size R	MOP	P (DN)	L	Dimensions (mm)				Weight (Kg)
					A	M	t	Minimum Thickness	
3505 04	1/2"	5	15	58	35,5	50	15,5	1,6	0,167
3505 05	3/4"	5	20	65	44,5	62	16,5	1,7	0,273
3505 06	1"	5	25	78	47	62	19,5	2	0,414