




1029 Bronze Globe Valve (PN32)

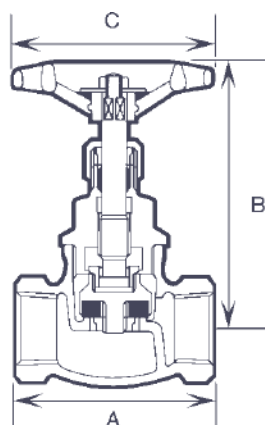

Features & Benefits

Female BSPT taper threaded to DIN 2999
 Specifications to BS5154 series B
 Renewable PTFE disc
 Screwed bonnet
 Rising stem

Pressure/Temperature Ratings

Maximum pressure: 32 bar (PN32)

Temperature range:

0°C - 198°C

32 bar (0 - 100°C)

14 bar (0°C - 198°C)

Size	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2
A	44	46	57	65	78	89	100	121
B	76	76	95	98	114	138	159	170
C	60	60	75	75	85	95	105	120
Weight (Kg)	0.20	0.22	0.38	0.54	0.84	1.36	1.76	2.62

Construction Materials

Body	Bronze
Bonnet	Brass
Stem	Brass
Disc	PTFE