




1039 Bronze Horizontal Lift Type Check Valve (PN32)

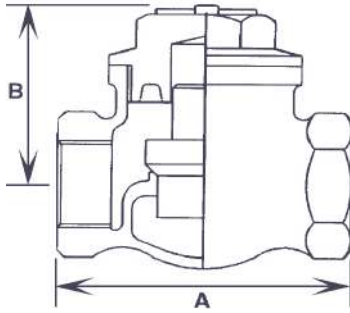

Features & Benefits

Female BSPT taper threaded to DIN 2999
 Specifications to BS5154 series B
 Metal seat
 Suitable for air, oil, steam & water
 For horizontal installation only
 Cracking pressure: 0.5 - 1 bar

Pressure/Temperature Ratings

Maximum pressure: 32 bar (PN32)

Temperature range:

0°C - 198°C

32 bar (0 - 100°C)

14 bar (0°C - 198°C)

BSPP	1/2	3/4	1	1 1/4	1 1/2	2
A	57	65	78	89	100	121
B	30	40	45	55	60	65
Weight Kg	0.28	0.44	0.68	1.14	1.46	2.24

Construction Materials

Body	Bronze
Disc	Brass
Cap	Brass