



VC Automatic Air Vent

Features

Float-type mechanical valve for venting air automatically from water piping systems at start-up and during operation .

1. Combination of float and valve seat with rubber contact provides automatic discharge and assures seal tightness when vent is closed.
2. Only one moving part, the float, eliminates concentrated wear and provides long maintenance-free service life.
3. Facilitates drainage of the system by introducing air when the system has to be drained.
4. Dual function as air vent and vacuum breaker.



Specifications


Model		VC2	VC3	VC4
Body Material		Bronze	Cast Iron	
Connection		Screwed		
Size	Inlet	1/2"	1"	
	Outlet		3/8"	
Maximum Operating Pressure (barg)	PMO	5	6	10
Minimum Operating Pressure (barg)		0.5	1	
Maximum Operating Temperature (°C)	TMO	90		
Applicable fluid*		Water		

* Do not use for toxic, flammable or otherwise hazardous fluids
 PRESSURE SHELL DESIGN CONDITIONS (NOT OPERATING CONDITIONS): Maximum Allowable Pressure (barg) PMA: 5 (VC2), 6 (VC3), 10 (VC4)
 Maximum Allowable Temperature (°C) TMA: 185 (VC2), 200 (VC3), 150 (VC4)

CAUTION To avoid abnormal operation, accidents or serious injury, DO NOT use this product outside of the specification range. Local regulations may restrict the use of this product to below the conditions quoted.


No.	Description	Material	DIN*	ASTM/AISI*
①	Body	VC2	Bronze CAC407	CC498K B584 C92200
		VC3, VC4	Cast Iron FC250	0.6025 A126 Cl.B
②	Cover	VC2	Bronze CAC407	CC498K B584 C92200
		VC3, VC4	Cast Iron FC250	0.6025 A126 Cl.B
③	Float	Stainless Steel SUS316L	1.4404	AISI316L
④	Valve Seat	VC2	Nitrile Rubber NBR	NBR D2000BF
		VC3, VC4	Nitrile Rubber NBR/ Stainless Steel SUS303	NBR/ 1.4305 D2000BF/ AISI303
⑤	Cover Gasket	VC2, VC3	Fluorine Resin PTFE	PTFE
		VC4	Fiber Rubber Compound	—
⑥	Valve Seat Gasket	Fluorine Resin PTFE	PTFE	PTFE
⑦	Cover Bolt	Carbon Steel SS400	—	A283 Gr.C
⑧	Nameplate	Stainless Steel SUS304	1.4301	AISI304

* Equivalent materials

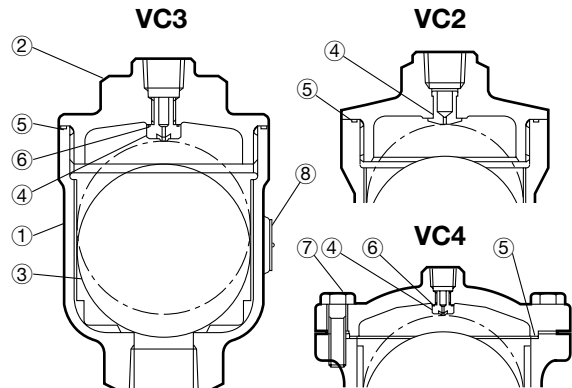

Dimensions

● VC2/VC3 Screwed




VC Screwed* (mm)

Model	Size		L	W	Weight (kg)
	Inlet	Outlet			
VC2	1/2"	3/8"	98	66	0.6
VC3	1"		131	88	1.8
VC4			190	160 (180)**	7.4

* BSP, DIN 2999, other standards available


** Face-to-face (diagonal)

● VC4 Screwed



Note: For the inlet connection, use a pipe/fitting, etc. with an inner diameter of at least 16 mm, such as a schedule 40 pipe or pipe nipple with a nominal diameter of 15 mm for VC2. A smaller pipe may prevent water/air displacement.

Discharge Capacity

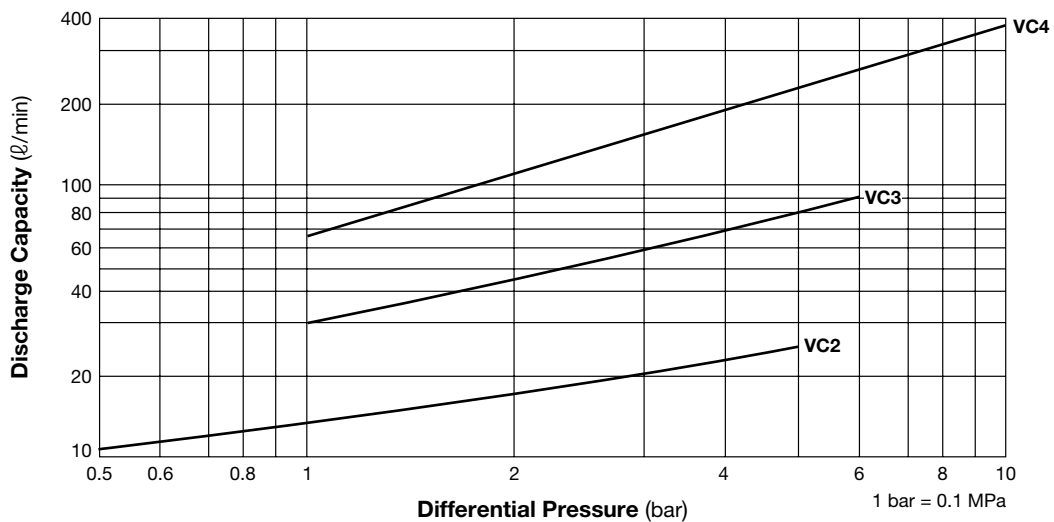

1. Differential pressure is the difference between the inlet and outlet pressure of the air vent.
2. Capacities are equivalent capacities of air at 20°C under atmospheric pressure.



CAUTION Air vents used under conditions which exceed maximum differential pressure will fail closed.