


Jinan Meide - Fig 241

Malleable Iron Hexagon Reducing Bushes

General Specifications

Available Black (Self-Colour) & HDG Galvanised
 Cast Malleable Iron Fittings (Dimensions to BS EN 10242)
 BSPT Taper/Taper Threaded (ISO 7-1)
 BSI Kitemarked
 Maximum Pressure: 25 bar
 Temperature Range: -20°C - 300°C
 ISO 9001 Accredited Manufacturer

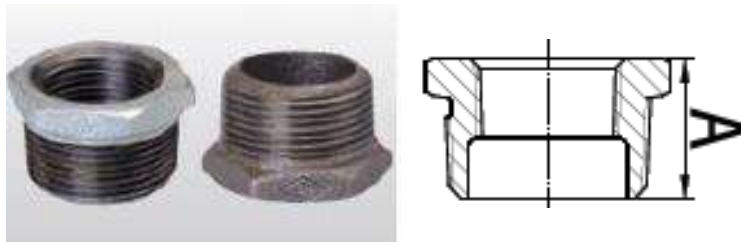

Nominal bore		Length dim. A	Weight each	Nominal bore		Length dim. A	Weight each
Metric	Imperial			Metric	Imperial		
8x6	1/4x1/8	20	0.02	40x15	11/2x1/2	31	0.26
10x6	3/8x1/8	20	0.02	40x20	11/2x3/4	31	0.25
10x8	3/8x1/4	20	0.02	40x25	11/2x1	31	0.21
15x6	1/2x1/8	24	0.04	40x32	11/2x11/4	31	0.14
15x8	1/2x1/4	24	0.04	50x25	2x1	35	0.44
15x10	1/2x3/8	24	0.03	50x32	2x11/4	35	0.37
20x8	3/4x1/4	26	0.08	50x40	2x11/2	35	0.30
20x10	3/4x3/8	26	0.07	65x15	21/2x1/2	40	0.74
20x15	3/4x1/2	26	0.06	65x20	21/2x3/4	40	0.84
25x8	1x1/4	29	0.12	65x40	21/2x11/2	40	0.68
25x10	1x3/8	29	0.11	65x50	21/2x2	40	0.53
25x15	1x1/2	29	0.11	80x50	3x2	44	1.05
25x20	1x3/4	29	0.09	80x65	3x21/2	44	0.68
32x10	11/4x3/8	31	0.20	100x20	4x3/4	51	2.17
32x15	11/4x1/2	31	0.21	100x25	4x1	51	2.17
32x20	11/4x3/4	31	0.18	100x32	4x11/4	51	2.20
32x25	11/4x1	31	0.13	100x40	4x11/2	51	2.13
40x8	11/2x1/4	31	0.25	100x80	4x3	51	1.59
40x10	11/2x3/8	31	0.25				