


Jinan Meide - Fig 291/291S Malleable Iron Plain Plugs

General Specifications

291 (Hollow) / 291S (Solid)
 Available Black (Self-Colour) & HDG Galvanised
 Cast Malleable Iron Fittings (Dimensions to BS EN 10242)
 BSPT Taper/Taper Threaded (ISO 7-1)
 BSI Kitemarked
 Maximum Pressure: 25 bar
 Temperature Range: -20°C - 300°C
 ISO 9001 Accredited Manufacturer

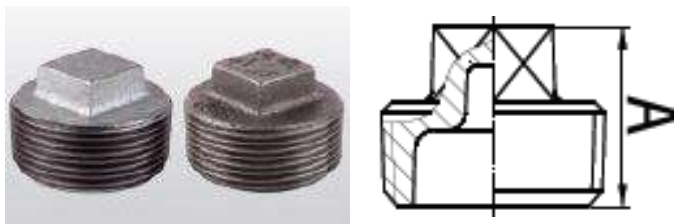

Nominal bore		Length dim. A mm	Hollow	Solid
Metric	Imperial		Weight each kgs	Weight each kgs
6	1/8	11	N/A	0.01
8	1/4	14	N/A	0.02
10	3/8	15	N/A	0.02
15	1/2	18	0.03	0.04
20	3/4	20	0.06	0.07
25	1	23	0.09	0.14
32	1 1/4	29	0.14	0.23
40	1 1/2	30	0.20	0.34
50	2	36	0.30	0.54
65	2 1/2	39	0.46	N/A
80	3	44	0.70	N/A
100	4	58	1.27	N/A
150	6	71.5	3.00	N/A